

McKissick® Easy Reeve® Crane Blocks

380 Series Easy Reeve® Hook Blocks



SEE APPLICATION AND WARNING INFORMATION


Para Español: www.thecrosbygroup.com On Pages 342 - 349



Center "Dead End" to promote better block travel under various reeving configurations.

Sheave Guards that open to allow block reeving without removing the rope end fitting.

The patented McKissick® Split-Nut is the standard retention system for standard crane blocks up to 80 tons.

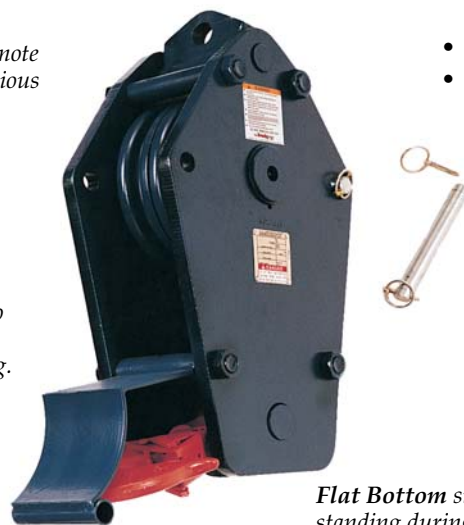

Flat Bottom side plate for self standing during reeving process.

- Wide range of product available.
 - Capacity: 4,5 to 72 t - Larger Models Available.
 - Sheave Sizes: 254 - 508 mm.
 - Wire Line Sizes: 11 - 28 mm.
- All single point shank hooks are genuine Crosby®, forged alloy steel, Quenched and Tempered, and have the patented **QUIC-CHECK®** markings (Duplex hooks are available on most sizes).
- Design factor of 4 to 1 (unless otherwise noted).
- All Easy Reeve® Blocks are furnished standard with Roller Bearings.
- Reeving Guides Standard - All Models.
- Blocks thru 20 t use 319N hooks with S-4320 latches.
- Heavy Duty Positive Locking (PL) Latch - Models: 25 tons and larger.
- Sheave lubrication through center pin - separate lube channel to each bearing.
- Sheaves fully protected by side plates.
- Dual action hook (swings and rotates).
- Repair parts available through world wide distribution network.
- All Easy Reeve® blocks, 16" and larger, are furnished with McKissick® Roll-Forged™ sheaves with flame hardened grooves.
- Manufactured by an ISO 9001 and API Q1 certified facility.
- "Look for the Orange Hook . . . the mark of genuine McKissick® quality".

OPTIONS AVAILABLE

- Duplex Hooks (75 tons & larger)
- Swivel Tee and Shackle Assemblies
- Sheave Shrouds
- Anti Rotation - Locking Device (75 tons & larger)
- Plate Steel Cheek Weights
- Third party testing with Certification available upon request.

*Forged Crosby® alloy steel hooks with patented **QUIC-CHECK®** markings and Heavy Duty positive locking hook latch.*