

# McKissick® Oilfield Drilling Blocks



**SEE APPLICATION AND WARNING INFORMATION**


Para Español: [www.thecrosbygroup.com](http://www.thecrosbygroup.com)

On Pages 342-349



## RJ Style Drilling Blocks

- Capacities Available: 150, 250 & 350 Tons; (146, 227 & 318 metric tons)
- Double row, pre-adjusted tapered bearings with seals.
- Blocks contain McKissick® Roll-Forged® sheaves with flame hardened grooves
  - Grooves are API profile
- Separate lubrication channel to each sheave.
- Easy opening guards for quick string-up (no bolts to pull out and lose).
- Each hook block is fitted with position lock and swivel lock assemblies.
- Additional weights available upon request.
- Manufactured to the requirements of API 8C, including all documentation.
  - Each block is individually serialized for full traceability.
  - Furnished with Certificate of Conformance.
- Hook is spring loaded with hydraulic snubber.
- Minimum design temperature of -20 degree C (-4 degree F).
- Standard top coat finish is safety orange enamel.
  - Other paint colors and systems are available on request.
  - Individual parts are primer coated on exposed surfaces.
- Combination hook blocks have interchangeable parts with BJ type McKissick® blocks built up to 1982.
  - Contact Crosby Customer Service for details.
- All sizes are **RFID EQUIPPED**.

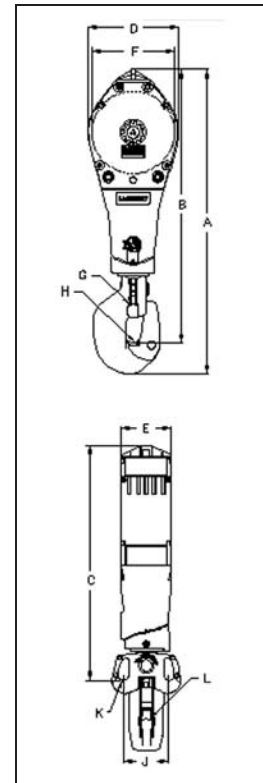

## RJ Style Drilling Blocks

Model No.	RJ Block Stock No.	Working Load Limit (t)	Sheave Diameter (mm)	No. of Sheaves	Standard Wire Rope Size (mm)*	Dimensions (mm)										Weight Each (kg)	
						A	B	C	D	E	F	G	H	J	K		L
864	2028185	146	762	4	28	2973	2629	2261	826	514	762	60.5	76.2	508	51.0	108	2944
865	2028194	146	914	4	28	3089	2746	2378	978	559	914	60.5	76.2	508	51.0	108	3837
866	2028203	146	914	5	28	3089	2746	2378	978	679	914	60.5	76.2	508	51.0	108	4377
868	2024318	227	914	5	28	3288	2926	2554	965	616	914	95.3	82.5	502	47.8	102	4762
869	2024317	227	1067	5	28	3440	3078	2707	1118	616	1067	95.3	82.5	502	47.8	102	4990
870	2024301	318	1067	5	32	3747	3366	2883	1118	616	1067	95.3	82.5	559	63.5	102	5761

\* May be furnished in other wire rope sizes.