


McKissick® Overhaul Balls

UB500 SERIES NON SWIVELING OVERHAUL BALLS



S320N Eye Hook

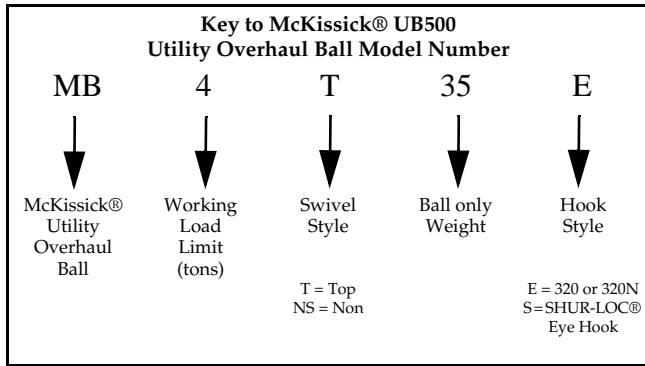

S1316A SHUR-LOC® Eye Hook



Both styles available with optional McKissick® Wedge Socket Assembly



UWO 422T TERMINATOR™ Wedge Only

- Sizes 4 tons through 10 tons available with Crosby's S316A "Positive Locking" SHUR-LOC® hook which may be used for lifting personnel. Meets OSHA Rule 1926.550 (g).
- Design Factor 4:1.
- Each ball can be equipped with the new McKissick® US-422T Wedge & Socket which can be easily adjusted to fit various sizes of wire rope by changing the wedge (Ensure that correct wedge is used for selected wire rope size).
- All hooks used on UB500 Overhaul Balls (S320, S320N & S1316A) are forged from alloy steel. The S320 and S320N hooks come complete with latches.
- The S320 hook (PL latch) and the S320N hook (S4320 latch), with the proper latch attached, may be used for personnel lifting when secured with proper device (Bolt, nut and pin for the PL latch; Cotter pin for the S4320 latch). Meets OSHA Rule 1926.550 (g).

Overhaul Ball Assembly					Optional US-422T Wedge Sockets						
McKissick® UB500 Model No.	UB500 "E" Eye Hook Stock No.	UB500 "S" SHUR-LOC® Stock No.	Working Load Limit (t)	Weight Each (kg)	Wire Rope Size (mm)	Model No.	Wedge Socket Assy. Stock No.	Weight Each (kg)	Wedge Socket Assy. Stock No.	Weight Each (kg)	
MB4NS35	1036402*	1036407	3.6	24.5							
MB4NS85	1036411*	1036416	3.6	44.5	9.6	US4T	1044300	2.1	1047310	0.27	
MB4NS150	1036420*	1036425	3.6	71.5	11	US4T	1044309	2.1	1047301	0.27	
MB4NS200	1036429*	1036434	3.6	90.7	13	US4T	1044318	2.1	1047329	0.27	
MS7NS85	1036438*	1036443	6.3	47.2	13	US5T	1044327	3.9	1047338	0.45	
MB7NS150	1036447*	1036452	6.3	74.8	14	US5T	1044336	3.9	1047347	0.45	
MB7NS200	1036456*	1036461	6.3	92.9	16	US5T	1044345	3.9	1047356	0.45	
MB7NS285	1036465*	1036470	6.3	143	16	US6T	1044354	4.3	1047365	0.64	
MB10NS150	1036474*	1036479	9.0	89.8	19	US6T	1044363	4.3	1047374	0.64	
MB10NS200	1036483*	1036488	9.0	110	16	US6T	1044354	4.3	1047365	0.64	
MB10NS285	1036492*	1036497	9.0	157	19	US6T	1044363	4.3	1047374	0.64	
MB10NS350	1036501*	1036506	9.0	175	22	US8T	1044404	9.4	1047425	1.4	
MB10NS650	1036510*	1036511	9.0	318	25	US8T	1044417	9.4	1047431	1.4	
MB12NS150	1036519*	—	10.8	89.8	28	US10T	1044426	21.1	1047440	4.1	
MB12NS200	1036528*	—	10.8	109	32	US10T	1044435	21.1	1047459	4.1	
MB12NS285	1036537*	—	10.8	157							
MB12NS350	1036546*	—	10.8	175							
MB12NS650	1036555*	—	10.8	318	16	US8AT	1044372	7.9	1047383	1.4	
MB15NS200	1036564*	—	13.5	121	19	US8AT	1044381	7.9	1047392	1.4	
MB15NS350	1036573*	—	13.5	193	22	US8T	1044404	9.4	1047425	1.4	
MB15NS650	1036582*	—	13.5	327	25	US8T	1044417	9.4	1047431	1.4	
MB15NS1150	1036591*	—	13.5	581	28	US10T	1044426	21.1	1047440	4.1	
					32	US10T	1044435	21.1	1047459	4.1	

* Hook is New S-320N style. Replacement latch kit is S-4320. PL latch and S-4055 latch will not fit.